

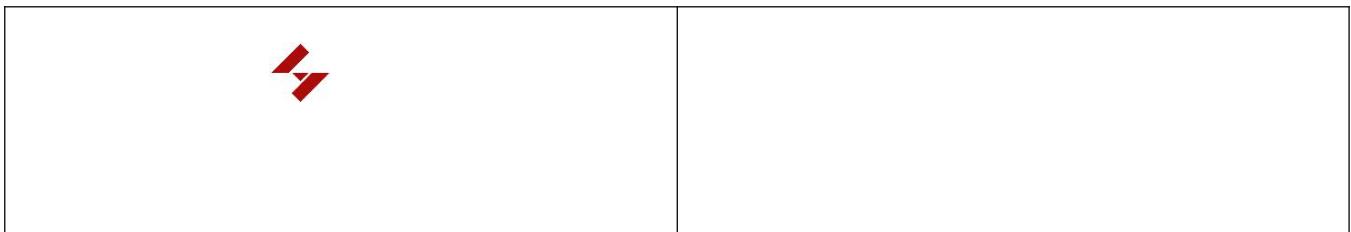




-
-
-
-

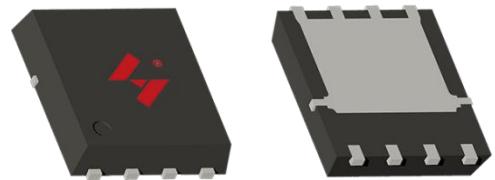

	- - -		
θ			
θ			





	- - -		0 & 0 & 1	
				m
	- - -			

0 & 0 & 1





- - - (.)

	- -		0 0 & 1	
	- -			
	- -			

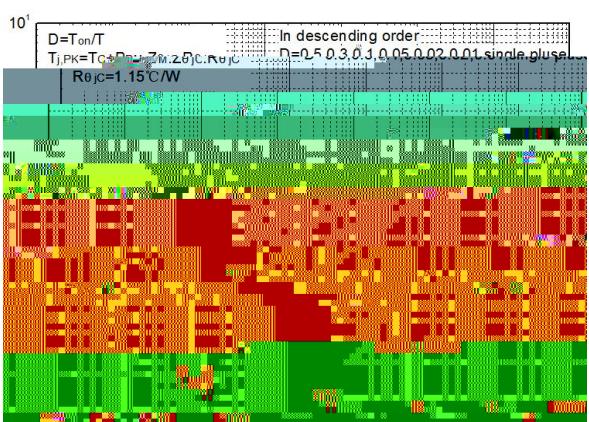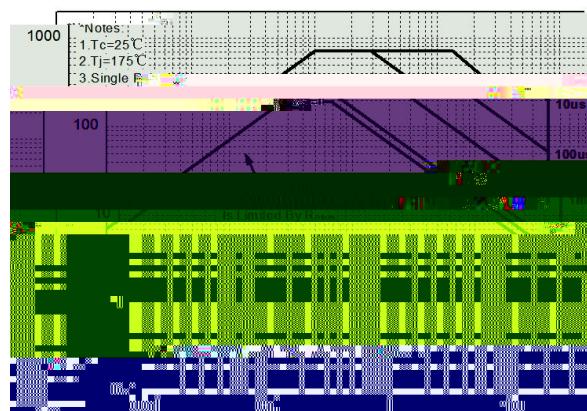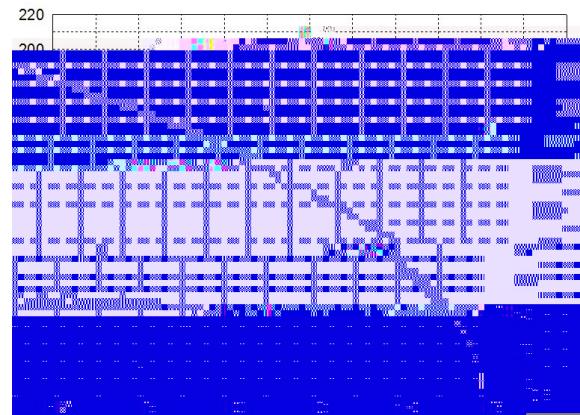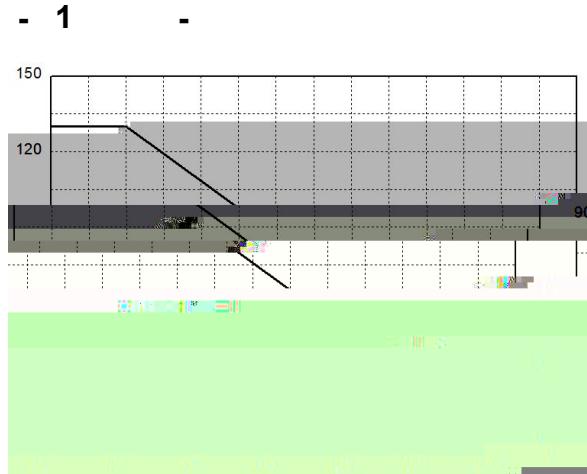



Max Effective Transient Thermal Impedance Junction to Case

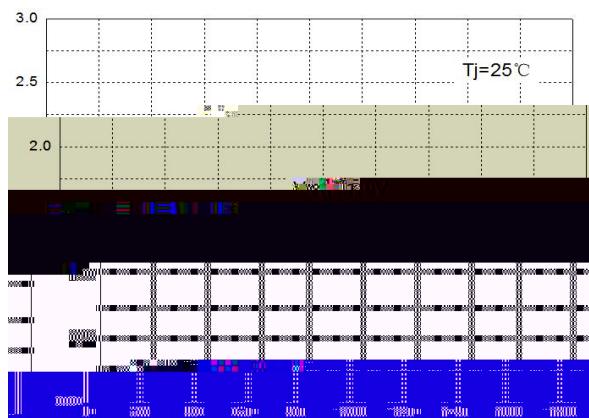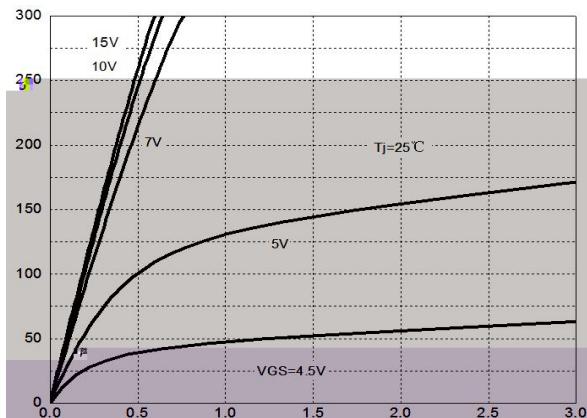



0 & 0 & 1

(.)




(.)

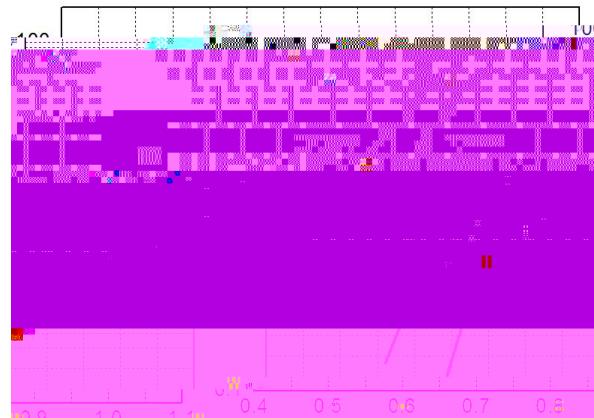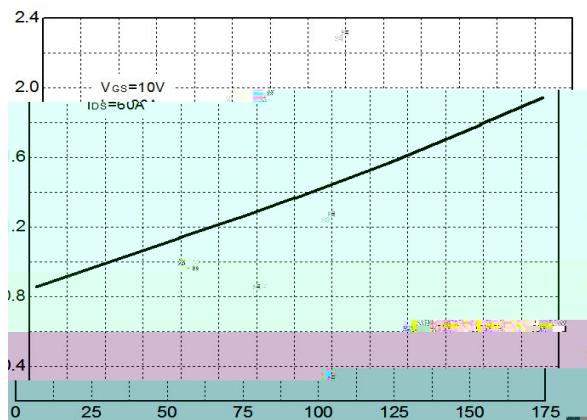


- 10 -

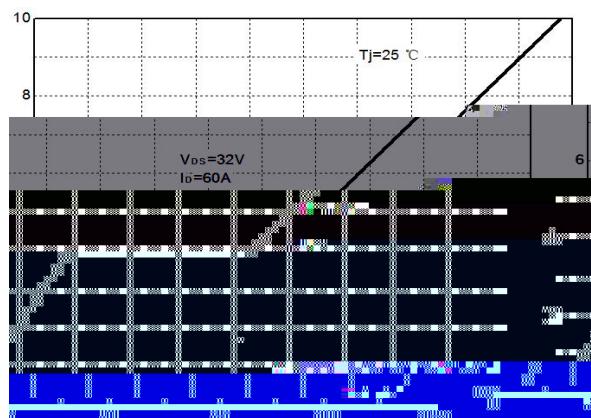
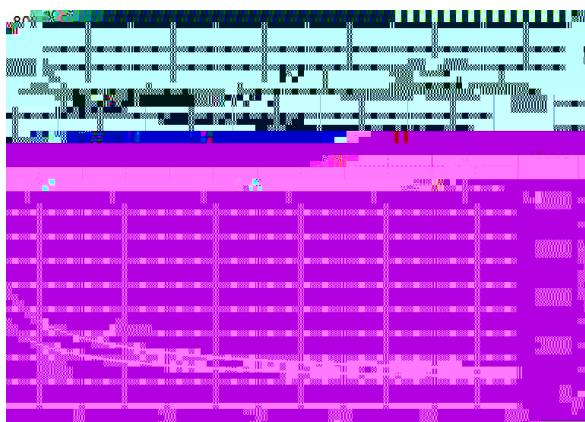



(

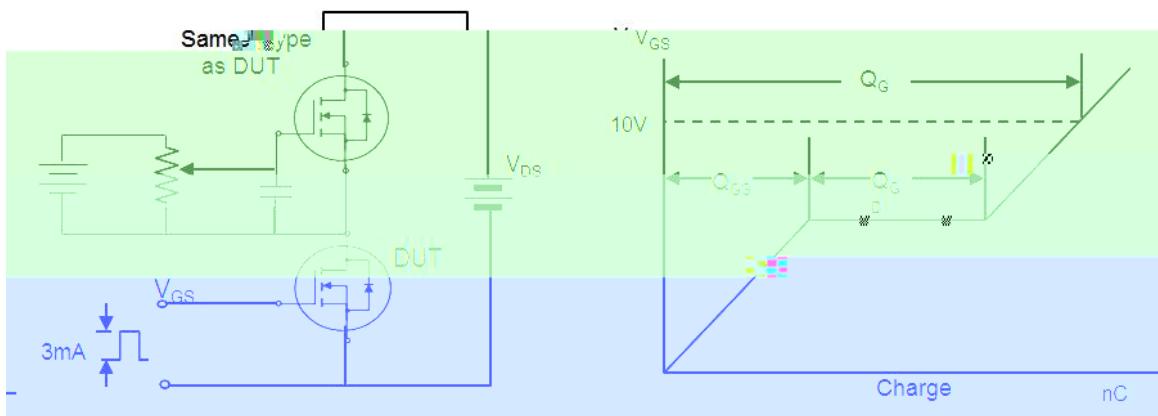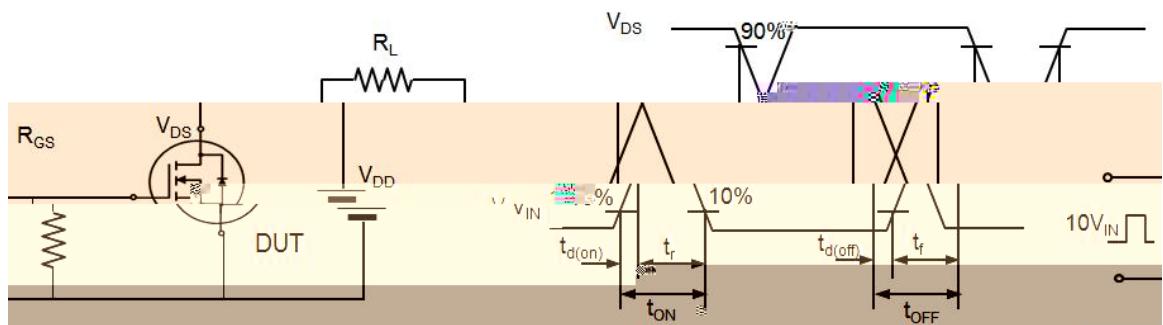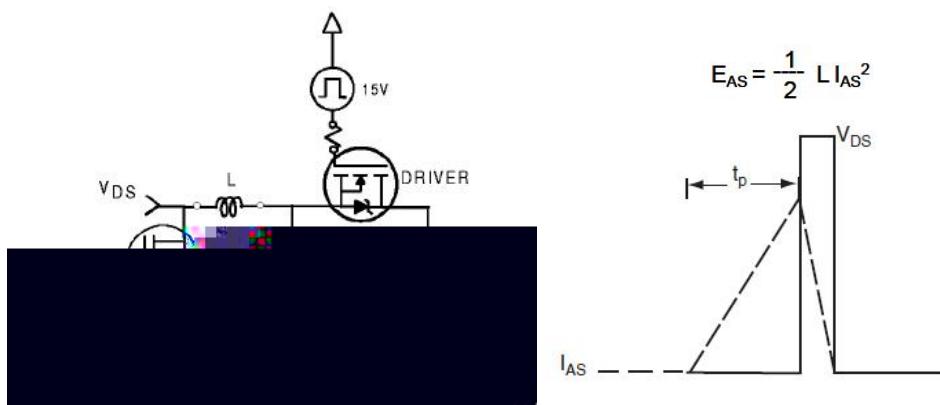



& (

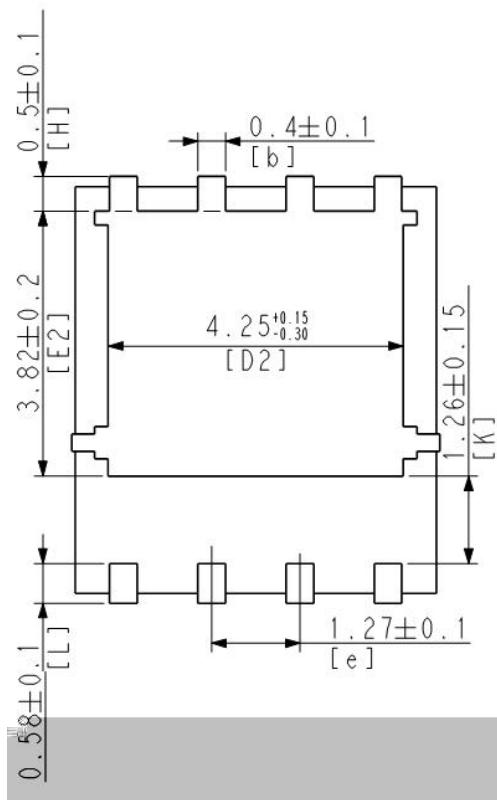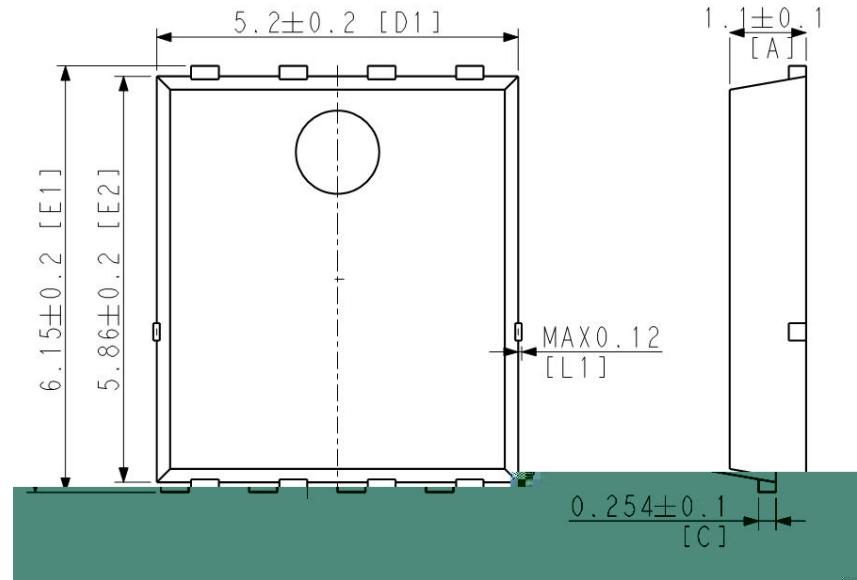

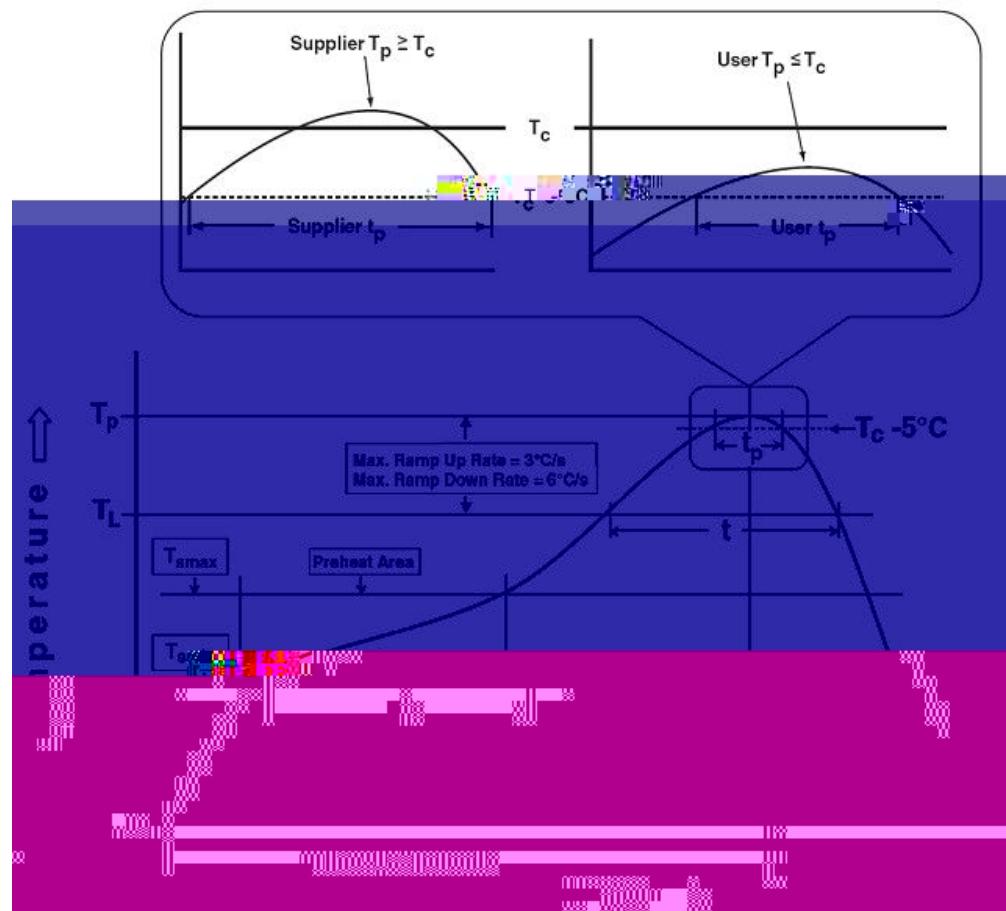

0 & 0 & 1



	0	0

	0	0-000	000

-	-	-

- -(-
